




RIG # 36

MID CONTINENT U-1220-EB SCR

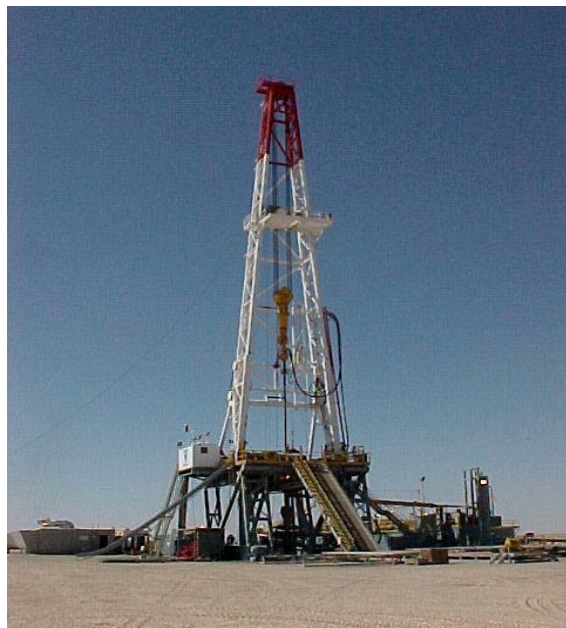

GENERAL PARTICULARS

Depth rating:	20,000 ft
Horsepower:	2,500 HP
Max. Hookload:	1,550,000 lbs
Year of construction/total refurbishment:	1995
Total no. of loads:	75 (approx)

DRAWWORKS

Type:	Mid Continent U-1220-EB
HP rating:	2,500 HP
Single line pull:	228,000 lbs
Drilling line:	1 1/2" EIPS
Auxiliary brake:	Elmagco 7838 Dynamatic
Drive type:	EMD-D79 (x2)
HP rating:	1250HP (x2)

MAST

Type:	Dreco Cantilever
Height:	147 ft
G.N.C.:	2,000,000 lbs
Max. hookload:	1,550,000 lbs

SUBSTRUCTURE

Type:	Dreco Slingshot
Height:	30 ft
Casing load:	1,500,000 lbs
Setback load:	800,000 lbs

TOP DRIVE

Type:	Nil
Rating:	
Torque:	

ROTARY TABLE

Type:	Oilwell B 37 1/2
Table opening:	37.1/2"
Drive:	Independent DC

POWER GENERATION

Gen type:	Kato (x4)
Gen rating:	1,030 kW (x4)
Engine type:	Cat 3512 TAC (x4)
HP rating:	1,325 HP (x4)

MUD PUMPS

Type:	Gardner Denver (x3)
HP rating:	PZ-11 (x3)
Drive:	1,600 HP (x3)
	EMD - D79 (x3)

SCR

Type:	Ross Hill 1400 SCR
-------	--------------------

MUD SYSTEM

Active system capacity:	1,206 bbls
Reserve system capacity:	947 bbls
Shale shakers:	King cobra linear motion (x3)
Pressure rating:	5,000 psi

BOP'S

Annular:	1 - Hydril 13.5/8" 5,000
BOP's:	1 - Cameron 13.5/8" 10,000 Single Ram
Annular:	Type "U" CI with Shear Bonnets
BOP's:	1 - Cameron 13.5/8" 10,000 Double Ram Type "U"

SPECIAL FEATURES

High equipment specification
Sling shot self elevating sub